

## FEATURES AND BENEFITS:

- # Broad Operating Temperature (-40°C to 150°C)
- # Shock & Vibration Resistant
- # Hermetically Sealed
- # Eco-Friendly
- # Weldable Stainless Steel Terminals
- # Designed and Assembled in the USA

## APPLICATIONS:

- # Power Buffer for Actuators
- # Consumer Electronics
- # Propulsion Systems
- # Pyrotechnic Applications
- # Grid and Renewable Energy
- # Portable tools



## TECHNICAL SPECIFICATIONS

### ELECTRICAL

Rated Voltage	1.0 V
Surge Voltage	1.1 V
Rated Capacitance <sup>1</sup>	345 F
Initial ESR <sup>1</sup>	5.8 mΩ
Rated Capacitance at 25°C	340 F
Initial ESR at 25°C	8.2 mΩ
Leakage Current at 25°C <sup>2</sup>	0.2 mA

### PERFORMANCE

Rated Lifetime <sup>3</sup>	1,500 hours
Cycle life at 25°C <sup>4</sup>	>1,000,000 cycles
Lifetime at 25°C <sup>5</sup>	>20,000 hours
Shelf Life at 25°C <sup>6</sup>	>10 years
Shock & Vibration Survivability	500G <sub>peak</sub> & 20G <sub>rms</sub>
Hermeticity (Helium Leak Rate)	<1x10 <sup>-8</sup> cc/sec of He


### TEMPERATURE

Maximum Operating Temperature	150°C
Minimum Operating Temperature	-40°C
Storage Temperature Range <sup>6</sup>	-40°C to 160°C

### PHYSICAL


ØD1	ØD2	L1	L2	Mass	Volume
31.75 mm (1.25 in)	3.1 mm	70 mm (2.75 in)	0.79 mm	0.110 kg	0.055 L

### ESR AND CAPACITANCE VS. TEMPERATURE

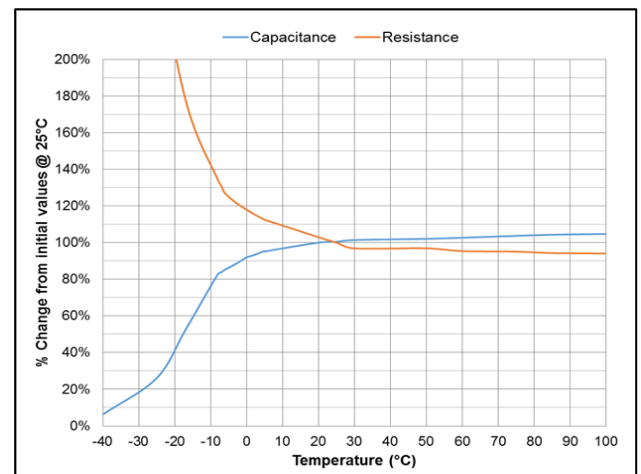

Notes:

1. At maximum operating temperature
2. After 72 hours at rated voltage
3. Held continuously at rated voltage and maximum operating temperature
4. Continuous cycles at rated voltage
5. Held continuously at rated voltage
6. Fully discharged
7. Negative terminal is entire external housing
8. Product dimensions as shown are for reference and not drawn to scale

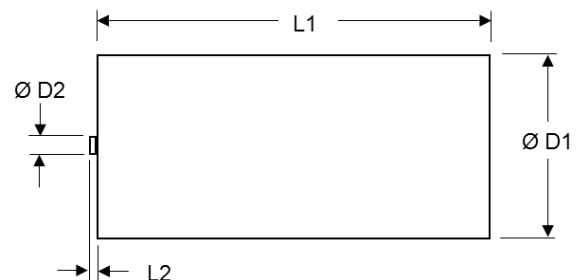

## Disclaimer

The information provided herein is correct to the best of FastCAP's knowledge, but is provided for discussion purposes only. The information along with the price and availability of any product are subject to change without notice. FastCAP shall not be liable for any errors, facts, or opinions is accepted. Customers must satisfy themselves as to the suitability of this product for their application. FastCAP is not responsible for any loss as a result of any person placing reliance on anything contained herein.